



Huron Telecommunications Co-operative Limited

P.O. Box 220, 60 Queen Street, Ripley, Ontario NOG 2R0
(519) 395-2625 1-877-395-2625

HIGH SPEED INTERNET SET-UP INSTRUCTIONS

Thank you for choosing HuronTel High Speed Internet. You have been provided with a complete setup kit, including a modem, power supply, line filter and all of the required cables. In order to deliver high speed internet to your computer, we install an office modem in our office, and you install the modem provided into your home/business. Once both of the modems are in place, and you have connected your modem to the computer using the instructions provided, then you can turn on your computer (or restart it to activate the connection).


TROUBLESHOOTING

Once all of the connections are made correctly, you should see the network light and the PC light turn green on your Internet modem. If the network light does not turn green after 5 minutes, double check the connections to the phone line. Make sure that the Internet modem is connected directly to the wall jack, and not through the filter provided. You may connect the Internet modem line through a surge protector but not a fax or answering machine. If the PC light is not green, then double-check the Ethernet cable connections. Make sure your network card and its software drivers are installed correctly. If you have problems with either the PC or the network connections, call the support line at 1-877-395-3800 or locally 519-395-3800.

PHONE FILTERING

Included with your Internet package is a line filter designed to block interference you may notice on telephones in your house. If you experience any unusual noise on the phone, then try inserting the filter provided. The D-Link modem already has a filter and does not require one to be connected to it. If you require additional filters for other phones in your building, call the business office at 395-2625.

BASIC FILTER CONNECTION DIAGRAM

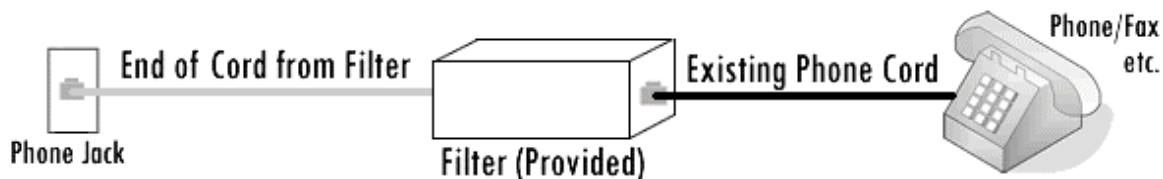

Your Computer (Rear View)

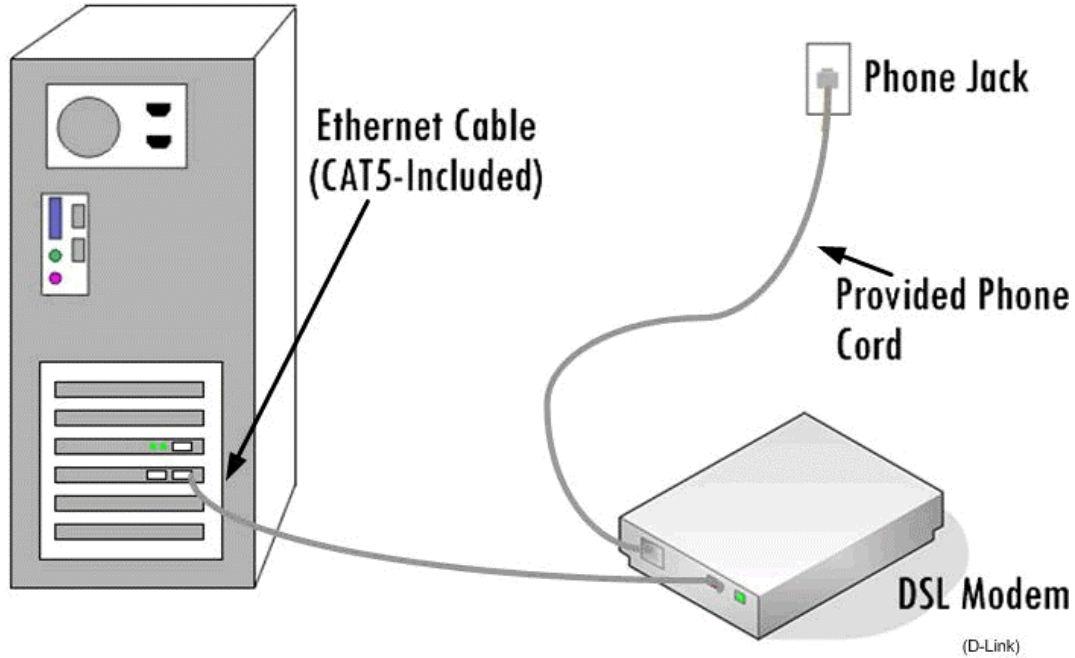


Diagram Explanation:

- 1) Plug the Ethernet cable (provided-looks like a larger phone cord) into the port on the **modem** labelled "**PC.**"
- 2) Plug the provided phone cord into the port on the **modem** labelled **WALL JACK** and then subsequently into your wall jack.
- 3) Power up your modem and ensure that the lights on your modem are green.

If you experience problems, please contact the Internet Support Group @ 395-3800 or 1-877-395-3800.